


DURACELL®

7K67
Size: J (4LR61)


Zn/MnO₂

Alkaline-Manganese Dioxide Battery

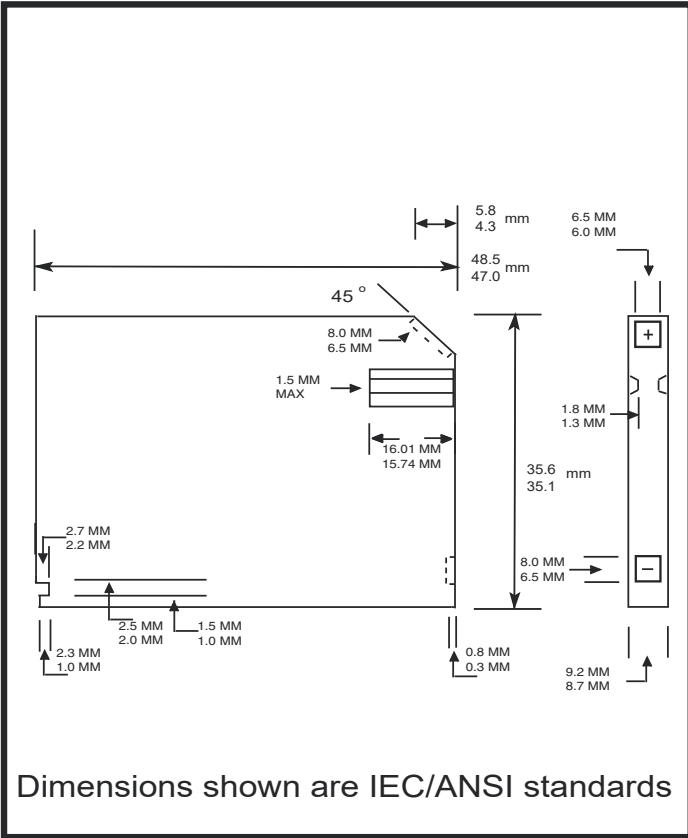

| | |
|-------------------------------------|-----------------------------------------------|
| Nominal Voltage: | 6 V |
| Nominal Internal Impedance: | 1100 m-ohm @ 1kHz |
| Average Weight: | 30.3 gm (1.1 oz.) |
| Volume: | 15.1 cm ³ (0.92 in. ³) |
| Terminals: | Flat |
| Operating Temperature Range: | -20°C to 54°C (-4°F to 130°F) |
| ANSI: | 1412AP |
| IEC: | 4LR61 |

Typical Discharge Characteristics at 21°C (70°F)

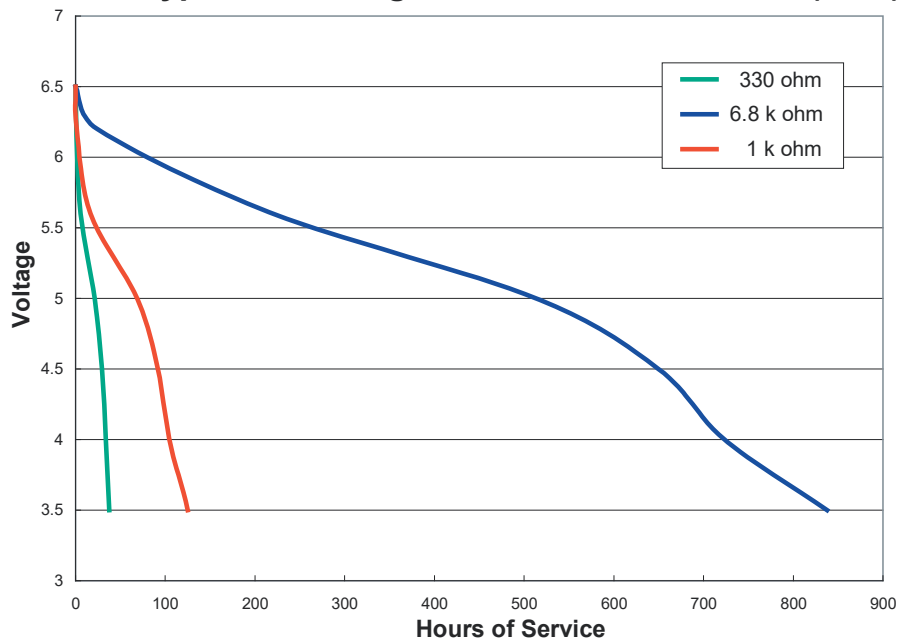

DURACELL®

BATTERIES

Berkshire Corporate Park
 Bethel, CT 06801 U.S.A.
 Telephone: Toll-free 1-800-544-5454
 Internet: www.duracell.com

*** Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.**